

- LED Rigid Array
- 120° Beam Spread
- APPLICATIONS:**
 - Low Profile
 - Interior/Exterior
 - Cabinet Accent
 - Closet
 - Under Bar/Counter
 - Tread/Toe Kick
 - Handrails
- Low Voltage
- Dimmable Option
- 36 Month Warranty




Description

The RLX500 is linear LED lighting in a rigid, low profile aluminum extrusion.

Interior and exterior trim and edge lighting applications: Cabinets, Bookcases, Ceiling Coves, Stairs, Under Counter, Toe Kick, Handrails to name a few.

Available in custom Lengths from 6 inches to 8 feet.

Low to No maintenance LED fixture.

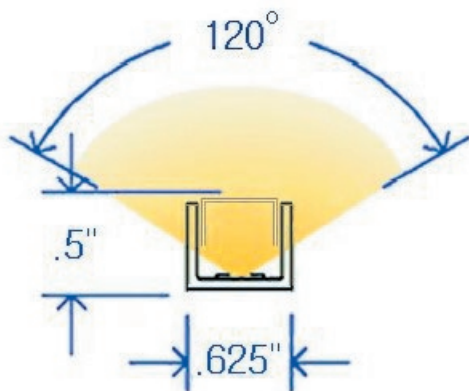

Phone: 714.862.2920
Fax: 714.492.1008
Email: sales@ledcohome.com
Web: www.ledcohome.com

RLX500 LED RIGID ARRAY

Specifications

LED Life (L70)	50,000 hours *
Input Voltage	24 VDC
LED Spacing	5/16 inch on center
Current Draw	3.7 W per foot
C Channel	.625" W x .5" H Aluminum Extrusion
Length	6 inches to 8 feet
Adhesion	3M Double Sided Tape on Housing
Wiring	18-2, SPT-1
Color Temperature	3000k 4000k
Dimmable	Option
Listing	ETL listed to UL Standards 8750 CAN/CSA C22.2 No. 250.13




*LED life is defined as the time to 70% lumen maintenance (L70)

Light Diagram



Ordering Guide

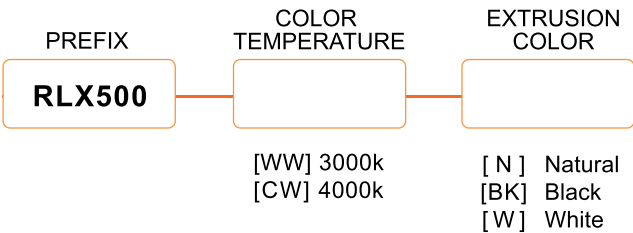

THE LED COMPANY
160 McCormick Ave, Costa Mesa, CA 92626

Phone: 714.862.2920
Fax: 714.492.1008
Email: sales@ledcohome.com
Web: www.ledcohome.com
Manufactured in the USA